

FUEL DISTRIBUTION



**AUTOMATIC
LUBE SYSTEMS**

AUTOMATIC LUBE SYSTEMS, INC.

WWW.AUTOMATICLUBESYSTEMS.COM

PHONE: 844-LUBE-SYS OR 844-582-3797

SALES@AUTOMATICLUBESYSTEMS.COM





PUMPS

pag. 103



DISPENSER WITH/WITHOUT METER

pag. 106



HOSE REEL / HOSES

pag. 108



METERS

pag. 110



MANUAL/AUTOMATIC NOZZLE

pag. 112



MANUAL PUMP

pag. 116



DIESEL FILTERING

pag. 119



ACCESSORIES

pag. 120

300501



AC Pump For Transfer Of Diesel - Voltage 120V/60Hz

Sturdy cast iron structure, vane pump

With sintered steel rotor and acetal resin valves, induction motor with aluminum casing. Suitable for continuous use thermal motor overload protection

Flow rate 26gpm

Fuel inlet threaded: 1in NPTF

Voltage 120V/60HZ

Power watt 1150

Amp. max 5.7

Rpm 1450

By-pass valve & flanged connection



300501

300602



AC Pump for Transfer of Diesel - Voltage 120V/60HZ

Sturdy cast iron structure, vane pump

With sintered steel rotor and acetal resin valves, induction motor with aluminum casing. Suitable for continuous use thermal motor overload protection

Flow rate 18gpm

Fuel inlet threaded: 1in NPTF

Voltage 120V/60HZ

Power watt 800

Amp, max 3.9

Rpm 3400

By-pass valve & flanged connection



300602



300701



Battery Pump for Fuel Transfer - 12V

Vane pump with rotor

Flow rate 7gpm

Fuel inlet threaded: 3/4in NPTF

Voltage 12V

Power watt 300

Amp, max 24

Rpm 2900

Duty cycle 30 min

Max work pressure 20psi

By-pass valve incorporated the pump body



300701

FUEL PUMPS



300702

300702



Battery Pump for Fuel Transfer - 24V

Vane pump with rotor
Flow rate 7gpm
Fuel inlet threaded: 3/4in NPTF
Voltage 24V
Power watt 310/80

Amp, max 13/6.5
Rpm 2900/1500
Duty cycle 30 min
Max work pressure 20psi
By-pass valve incorporated the pump body



300801

300801



Battery Bi-Pump for Fuel Transfer - 12V

Vane pump with rotor
Flow rate 22,4gpm
Fuel inlet threaded: 1.1/2in NPTF
Voltage 12V
Power watt 500

Amp, max 42
Rpm 2000
Duty cycle 30 min
14ft cable
Flanged 1in connectors



300802

300802



Battery Bi-Pump for Fuel Transfer - 24V

Vane pump with rotor
Flow rate 22,4gpm
Fuel inlet threaded: 1.1/2in NPTF
Voltage 24V
Power watt 500

Amp, max 42
Rpm 2000
Duty cycle 30 min
14ft cable
Flanged 1in connectors



301301

301301



Atex Gasoline Pump 12V

Cast iron body
Flow rate 13 gpm
Fuel inlet threaded: 1in NPTF flanged
Voltage 12V
Power watt 250
Amp. Max 21

Duty cycle 30/60 min
Rpm 2700
Type of explosive atmosphere
By-pass valve built-in
Thermal protection
Fluids: diesel, gasoline & kerosene



301302

301302



Atex Gasoline Pump 120V

Cast iron body
Flow rate 13 gpm
Fuel inlet threaded: 1in NPTF flanged
Voltage 120V/60
Power watt 250
Amp. Max 2

Duty cycle 30/60 min
Rpm 2700
Type of explosive atmosphere
By-pass valve built-in
Thermal protection
Fluids: diesel, gasoline & kerosene

300901



Drum Kit Base 12V

Pump in aluminum with flow rate 13gpm

Fuel inlet threaded: 1in NPTF

Voltage 12 V

Duty cycle 30 min

Cable & clamps, manual nozzle, 14 ft x 3/4in delivery hose, telescopic suction tube(1/0 1in NPTF) drum connector 90° flanged connector & nozzle holder



300901

300902



Drum Kit Base 24V

Pump in aluminum with flow rate 13gpm

Fuel inlet threaded: 1in NPTF

Voltage 24 V

Duty cycle 30 min

Cable & clamps, manual nozzle, 14 ft x 3/4in delivery hose, telescopic suction tube(1/0 1in NPTF) drum connector 90° flanged connector & nozzle holder



300902

301001



Box Battery Kit Pro 12V

Pump in aluminum with flow rate 13gpm

Fuel inlet threaded: 1in NPTF

Voltage 12 V

Power watt 260

Amp. max 22

Duty cycle 30 min

Cable & clamps, manual nozzle, 20 ft x 3/4in delivery hose, suction hose with vantage foot valve, filter + cartridge 10 micra & gloves



301001

301002



Box Battery Kit Pro 24V

Pump in aluminum with flow rate 13gpm

Fuel inlet threaded: 1in NPTF

Voltage 24V

Power watt 260

Amp. max 22

Duty cycle 30 min

Cable & clamps, manual nozzle, 20 ft x 3/4in delivery hose, suction hose with vantage foot valve, filter + cartridge 10 micra & gloves



301002





301101



Dispenser With Meter

Structure in steel
 Pump in aluminum with flow rate 10 gpm
 Fuel inlet threaded : 3/4in NPTF
 Voltage 12V
 Power watt 260
 Amp. max 22
 Accuracy +/- 1%
 With mechanical meter K33, manual nozzle & 14ft x 1in delivery hose



301102



Dispenser with Meter

Structure in steel
 Pump in aluminum with flow rate 15 gpm
 Fuel inlet threaded : 3/4in NPTF
 Voltage 120V/60HZ
 Power watt 600
 Amp. max 3
 Accuracy +/- 1%
 With mechanical meter K33, manual nozzle & 14ft x 1in delivery hose



301103



Dispenser with Meter

Structure in steel
 Pump in aluminum with flow rate 15 gpm
 Fuel inlet threaded : 3/4in NPTF
 Voltage 24/12V
 Power watt 420
 Amp. max 35
 Accuracy +/- 1%
 With mechanical meter K33, manual nozzle & 14ft x 1in delivery hose



301201



Cube Dispenser 56

Structure in steel
 Pump in aluminum with flow rate 15 gpm
 Fuel inlet threaded : 1in NPTF * voltage 120V/60HZ
 Power watt 600
 Amp. max 3
 Accuracy +/- 1%
 IP55 protection
 With mechanical meter K33, manual nozzle & 14ft x 3/4in delivery hose



301202



Cube Dispenser 70

Structure in steel
 Pump in aluminum with flow rate 18 gpm
 Fuel inlet threaded : 1in NPTF * voltage 120V/60HZ
 Power watt 850
 Amp. max 4.2
 Accuracy +/- 1%
 IP55 protection
 With mechanical meter K33, manual nozzle & 14ft x 3/4in delivery hose

301601



Gasoline Dispenser 120V - Auto Nozzle

Cast iron body	Fuel inlet threaded: 1in NPTF
Flow rate 13 gpm	Voltage 120V
Bypass valve built-in	Power watt - 250
Thermal protection	Amp. Max. 2
Suction unit with integrated filter	
Automatic nozzle, 2in drum connector, telescopic pipe & 13ft x 3/4in delivery hose	



301601

301602



Gasoline Dispenser 12V - Auto Nozzle

Cast iron body	Fuel inlet threaded: 1in NPTF
Flow rate 13 gpm	Voltage 12V
Bypass valve built-in	Power watt - 250
Thermal protection	Amp. Max. 2
Suction unit with integrated filter	
Automatic nozzle, 2in drum connector, telescopic pipe & 13ft x 3/4in delivery hose	



301602

301701



Gasoline Dispenser 120V - Automatic Nozzle

Cast iron body	Fuel inlet threaded: 1in NPTF
Flow rate 13 gpm	Voltage 120V/60Hz
Bypass valve built-in	Power watt - 250
Thermal protection	Amp. Max. 2
Suction unit with integrated filter	
With mechanical meter K33, automatic nozzle, 2in drum connector, telescopic pipe & 13ft x 3/4in delivery hose	



301701

301702



Gasoline Dispenser 12V - Automatic Nozzle

Cast iron body	Fuel inlet threaded: 1in NPTF
Flow rate 13 gpm	Voltage 12V
Bypass valve built-in	Power watt - 250
Thermal protection	Amp. Max. 1
Suction unit with integrated filter	
With mechanical meter K33, automatic nozzle, 2in drum connector, telescopic pipe & 13ft x 3/4in delivery hose	



301702

AUTOMATIC HOSE REEL

Swivelling joint 90° DIESEL 145 psi NPTF 1in

Galvanized steel, viton seals

Equipped with:

Antistatic black rubber hoses

Galvanized connections

Swivelling joint 90° galvanized

Viton seals



DI


Article	Delivery	Hose length	Ø hose	Inlet-outlet
350213	25.08 gal/min	Without hose	-	NPTF 1in - NPTM 1in
350101	23.76 gal/min	30 ft	3/4in	NPTF 1in - NPTM 1in
350103	25.08 gal/min	30 ft	1in	NPTF 1in - NPTM 1in
350102	22.44 gal/min	45 ft	3/4in	NPTF 1in - NPTM 1in

DI

Article	Delivery	Hose length	Ø hose	Inlet-outlet
350214	25.08 gal/min	Without hose	-	NPTF 1in - NPTM 1in
350105	23.76 gal/min	45 ft	1in	NPTF 1in - NPTM 1in
350104	21.912 gal/min	65 ft	3/4in	NPTF 1in - NPTM 1in

DI

Article	Delivery	Hose length	Ø hose	Inlet-outlet
350215	25.08 gal/min	Without hose	-	NPTF 1in - NPTM 1in
350108	22.97 gal/min	65 ft	1in	NPTF 1in - NPTM 1in
350106	21.12 gal/min	95 ft	3/4in	NPTF 1in - NPTM 1in
350109	22.44 gal/min	95 ft	1in	NPTF 1in - NPTM 1in
350107	19.8 gal/min	130 ft	3/4in	NPTF 1in - NPTM 1in

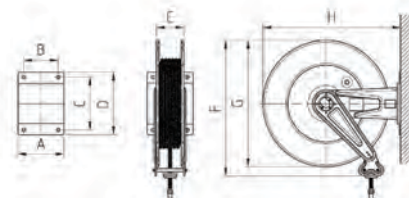

Mod.	A	B	C	D	E	F	G	H	lbs	ft³	m³
350101 - 350102 - 350103	7.87	5.91	8.86	10.63	4.72	23.23	21.65	23.62	48.51 < 99.23	3.00	1
350104 - 350105	9.84	7.87	8.86	10.63	6.69	23.23	21.65	23.62	57.33 < 116.87	3.53	1
350106 - 350107 - 350108 - 350109	17.32	15.35	8.86	10.63	14.17	23.23	21.65	23.62	72.77 < 183.02	6.36	1



Diesel 140 psi

Antistatic black rubber hoses

Galvanized connections



Article	Hose length	Ø hose	Dimensions	Inlet-outlet
350201	30 ft	3/4in	7.49 x 10.64	NPTF 1in - NPTM 1in
350202	45 ft	3/4in	7.49 x 10.64	NPTF 1in - NPTM 1in
350203	65 ft	3/4in	7.49 x 10.64	NPTF 1in - NPTM 1in
350204	95 ft	3/4in	7.49 x 10.64	NPTF 1in - NPTM 1in
350205	130 ft	3/4in	7.49 x 10.64	NPTF 1in - NPTM 1in
350206	30 ft	1in	9.85 x 13.79	NPTF 1in - NPTM 1in
350207	45 ft	1in	9.85 x 13.79	NPTF 1in - NPTM 1in
350208	65 ft	1in	9.85 x 13.79	NPTF 1in - NPTM 1in
350209	95 ft	1in	9.85 x 13.79	NPTF 1in - NPTM 1in

FUEL METER

350221



350221



Mechanical Meter - for Diesel

In aluminum
Flow rate 5 - 32gpm
Maximum work pressure 142psi
Fuel inlet threaded: 1in NPTF
Accuracy: +/- 1 %
Fuel outlet threaded: 1in NPTF
3 digit partial totals/6 digit totals
Nutating disk system

350219



350219



Mechanical Meter - for Diesel

In aluminum
Flow rate 5 - 32gpm
Maximum work pressure 142psi
Fuel inlet threaded: 1in NPTF
Accuracy: +/- 1 %
Fuel outlet threaded: 1in NPTF
4 digit partial totals/6 digit totals
Nutating disk system

302101



302101



Pulser Meter - for Diesel

In aluminum
Flow rate 2.64 - 26.4gpm
Maximum work pressure 426psi
Fuel inlet threaded: 1in NPTF with filter flanged
Accuracy: +/- 0.5 %
Fuel outlet threaded: 1in NPTF flanged
Measuring system oval gear in acetal resin

103001



103001



Remote Display Out

In aluminum
Used with all pulser meters

350216



Atex Mechanical Meter - for Fuel (Diesel, Gasoline and Kerosene)

Flow rate 5 - 32gpm
Maximum work pressure 50psi
Fuel inlet threaded: 1in NPTF
Accuracy +/- 1%
Fuel outlet 1in NPTF
3 digit partial totals/6 digit totals
Nutating disk system
Type of explosive atmosphere
Fluids: diesel, gasoline & kerosene



350216

301501



Atex Eletronic Meter - for Fuel

Flow rate 2 - 32gpm
Maximum work pressure 300psi
Fuel inlet threaded: 1in NPTF
Accuracy +/- 1%
Fuel outlet 1in NPTF
5 digit partial totals/6 digit totals
Measuring system turbine in polypropylene
Type of explosive atmosphere
Fluids: diesel, gasoline & kerosene



301501

302001



Eletronic Meter - for Fuel

The Flow Meter is a diesel flow meter that can be installed directly onto a fuel delivery nozzle or can be installed in-line at the end of the diesel delivery hose thanks to it's versatile 1in multiple inlet & outlet configurations.
In aluminum
Flow rate 2 - 32gpm
Maximum work pressure 300psi
Fuel inlet threaded: 1in NPTF
Accuracy: +/- 1 %
Fuel outlet threaded: 1in NPTF
5 digit partial totals/ digit totals
Measuring system turbine in polypropylene
Fluids: diesel



302001

301901



Eletronic Meter - for Diesel

In aluminum
Flow rate 2.64-26.4gpm
Maximum work pressure 426psi
Fuel inlet threaded: 1in NPTF with filter flanged
Accuracy: +/- 0.5 %
Fuel outlet threaded: 1in NPTF flanged
Measuring system oval gear in acetal resin
5 digit display



301901

FUEL NOZZLE



302901

302901 Automatic Nozzle - for Fuels - Green

In aluminum
Flow rate 26.4gpm
Maximum work pressure 35PSI
Fuel inlet threaded: 1in NPTF
Fuel outlet: spout Ø 1. 1/16in - (1in)
Color green



302902

302902 Automatic Nozzle - for Fuels - Red

In aluminum
Flow rate 26.4gpm
Maximum work pressure 35PSI
Fuel inlet threaded: 1in NPTF
Fuel outlet: spout Ø 1. 1/16in - (1in)
Color Red




302903

302903 Automatic Nozzle - for Fuels - Black

In aluminum
Flow rate 26.4gpm
Maximum work pressure 35PSI
Fuel inlet threaded: 1in NPTF
Fuel outlet: spout Ø 1. 1/16in - (1in)
Color Black




302701

302701 
Manual Nozzle - for Fuels
In aluminum
Flow rate 40gpm
Maximum work pressure 180psi
Fuel inlet threaded: swil 1in NPTF
Fuel outlet: spout diam 0.24in external



302702

302702 
Manual Nozzle - for Fuels
In aluminum
Flow rate 40gpm
Maximum work pressure 180psi
Fuel inlet threaded: swil 1in NPTF
Fuel outlet: spout diam 0.24in external



302801

302801 
Manual Nozzle - for Fuels with Hook
In aluminum
Fuel inlet threaded: Swivel 1in NPTF
Fuel outlet: Spout 15/16in - (3/4in)

** Do not use nozzle with a hold-open device at installations (such as pre-pay) where the normal flow of products may be stopped or started by means other than with the hose nozzle valve. Use nozzle without hold-open device. Failure to comply is a violation of NFPA Code 30-A and may create a hazardous condition. Use of foreign objects to hold open automatic nozzle could result in shut-off failure and personal injury.

302904



Automatic Nozzle - for Fuels - Green

In aluminum
Flow rate 11gpm
Maximum work pressure 25PSI
Fuel inlet threaded: 3/4in NPTF
Fuel outlet: spout Ø 13/16in - (1/2in)
Color Green



302904

302905



Automatic Nozzle - for Fuels - Red

In aluminum
Flow rate 11gpm
Maximum work pressure 25PSI
Fuel inlet threaded: 3/4in NPTF
Fuel outlet: spout Ø 13/16in - (1/2in)
Color Red



302905

302906



Automatic Nozzle - for Fuels - Blue

In aluminum
Flow rate 11gpm
Maximum work pressure 25PSI
Fuel inlet threaded: 3/4in NPTF
Fuel outlet: spout Ø 13/16in - (1/2in)
Color Blue



302906

302907



Automatic Nozzle - for Fuels - Yellow

In aluminum
Flow rate 11gpm
Maximum work pressure 25PSI
Fuel inlet threaded: 3/4in NPTF
Fuel outlet: spout Ø 13/16in - (1/2in)
Color Yellow



302907

302908



Automatic Nozzle - for Fuels - Black

In aluminum
Flow rate 11gpm
Maximum work pressure 25PSI
Fuel inlet threaded: 3/4in NPTF
Fuel outlet: spout Ø 13/16in - (1/2in)
Color Black



302908

302909



Automatic Nozzle - for Fuels - Grey

In aluminum
Flow rate 11gpm
Maximum work pressure 25PSI
Fuel inlet threaded: 3/4in NPTF
Fuel outlet: spout Ø 13/16in - (1/2in)
Color Grey



302909

** Do not use nozzle with a hold-open device at installations (such as pre-pay) where the normal flow of products may be stopped or started by means other than with the hose nozzle valve. Use nozzle without hold-open device. Failure to comply is a violation of NFPA Code 30-A and may create a hazardous condition. Use of foreign objects to hold open automatic nozzle could result in shut-off failure and personal injury.

FUEL NOZZLE



302910

302910



Automatic Nozzle - for Fuels - Green

In aluminum

Flow rate 11gpm

Maximum work pressure 25PSI

Fuel inlet threaded: 3/4in NPTF

Fuel outlet: spout Ø 15/16in - (3/4in)

Color Green



302911

302911



Automatic Nozzle - for Fuels - Red

In aluminum

Flow rate 11gpm

Maximum work pressure 25PSI

Fuel inlet threaded: 3/4in NPTF

Fuel outlet: spout Ø 15/16in - (3/4in)

Color Red



302912

302912



Automatic Nozzle - for Fuels - Black

In aluminum

Flow rate 11gpm

Maximum work pressure 25PSI

Fuel inlet threaded: 3/4in NPTF

Fuel outlet: spout Ø 15/16in - (3/4in)

Color Black



302913

302913



Automatic Nozzle with Hook - for Fuels - Green

In aluminum

Flow rate 11gpm

Maximum work pressure 25PSI

Fuel inlet threaded: 3/4in NPTF

Fuel outlet: spout Ø 0.83in

Color green



302914

302914



Automatic Nozzle with Hook - for Fuels - Red

In aluminum

Flow rate 11gpm

Maximum work pressure 25PSI

Fuel inlet threaded: 3/4in NPTF

Fuel outlet: spout Ø 0.83in

Color Red



302915

302915



Automatic Nozzle with Hook - for Fuels - Black

In aluminum

Flow rate 11gpm

Maximum work pressure 25PSI

Fuel inlet threaded: 3/4in NPTF

Fuel outlet: spout Ø 0.83in

Color Black

** Do not use nozzle with a hold-open device at installations (such as pre-pay) where the normal flow of products may be stopped or started by means other than with the hose nozzle valve. Use nozzle without hold-open device. Failure to comply is a violation of NFPA Code 30-A and may create a hazardous condition. Use of foreign objects to hold open automatic nozzle could result in shut-off failure and personal injury.

INSULATOR NOZZLE



303001



Insulator for Nozzle - Green

In rubber

For nozzles with spout Ø 13/16in Ø 15/16in & Ø 0.83in



303001

303002



Insulator for Nozzle - Red

In rubber

For nozzles with spout Ø 13/16in Ø 15/16in & Ø 0.83in



303002

303003



Insulator for Nozzle - Blue

In rubber

For nozzles with spout Ø 13/16in Ø 15/16in & Ø 0.83in



303003

303004



Insulator for Nozzle - Yellow

In rubber

For nozzles with spout Ø 13/16in Ø 15/16in & Ø 0.83in



303004



303005



Insulator for Nozzle - Black

In rubber

For nozzles with spout Ø 13/16in Ø 15/16in & Ø 0.83in



303005

303007



Insulator for Nozzle - Red

In rubber

For nozzles with Ø 1-1/6in



303007

303008



Insulator for Nozzle - Black

In rubber

For nozzles with Ø 1-1/6in



303008



201201



Rotary Barrel Pump Professional

Rotary barrel pump with aluminum die cast pump body, heavy duty zinc die cast rotor & vanes

Includes a 2in cast iron bung adaptor & die cast aluminum handle with security locking latch

3 pc thread suction tube use on 15 - 55 gallons barrels

6 ft hose with nozzle, spring & hose clamp

Flow rate 1.05 gallons/20 rotations

Fluids: gasoline diesel fuel, kerosene & lubrication oils up to SAE 90



201402



Ezee Flo Pumps for use with drums with capacity 55 gal - with Of discharge hose with spring

Heavy duty steel suction tube, with the pump head made from high density polyethylene

Includes 2 adaptadores for use with plastic & metal drums and an additional adaptor for use with plastic pull out spout

48in discharge hose fitted with curved metal spout

Use on 55 gallon drum

Fluids: engine oils, gear oils, diesel, 100% antifreeze and light fuel oil



201001



Lever Action Barrel Pumps

Premium powder coated steel pump body with ribbed section aluminum die cast pump head for maximum strength

Built-in 1.1/2in & 2in bung for use with either openings

Curved metal spout & telescopic suction tube for use on 15 - 55 gallons barrels - flow rate 10oz/stroke

Fluids: oil based fluids, heating oils, motor oils, heavy & light oils, diesel, kerosene



201801



Quart/ Litre Stroke Pump for drum with capacity 55 gal - bung adaptor 2in

Wetted components: steel aluminum nitrile rubber & acetal

Extremely useful in applications requiring metered delivery, the pumps works on a precision rack & pinion mechanism

Pump has built in 2in bung adaptor & comes complete with telescopic suction tube for use on 15 - 55 gallons drums

Flow rate 1quart/stroke

Gear & lube oil, petroleum based media, diesel & kerosene

300201



Industrial Rotary Pump - with antistatic hose, nozzle and bung adaptor

Solid cast iron construction

Pump handle rotates a high quality sintered powder metal 3 vane rotor inside a highly finished pumping chamber

Complete with 2in bung, 8in x 3/4in antistatic fuel hose, nozzle, holder & telescopic suction tube for use 15 - 55 gallons barrels

Flow rate 10gpm

Fluids: class I & II flammable & combustible liquids such gasoline naphtha, alcohols & other solvents compatible with the pump components



300201

300101



Double Diaphragm Fuel Transfer Pump - bung adaptor 2in

Heavy duty aluminum die cast construction

Stainless steel piston & fuel resistant nitrile rubber diaphragm

Includes a 2in die cast bung adaptor & extra heavy duty steel handle with security locking latch

With telescopic suction tube with non-return valve, for use 15 - 55 gallons drums

Flow rate 1gallon/5stroke

Fluids: gasoline, diesel fuel, fuel oil, motor oil & other light petroleum products



300101

300301



Industrial Rotary Fuel Pump - steel spout

Solid cast iron construction

Pump handle rotates a high quality sintered powder metal 3 vane rotor inside a highly finished pumping chamber

Complete with 2in bung for use 15 - 55 gallons barrels, steel discharge spout & telescopic suction tube

Flow rate 10gpm

Ideal for use with barrels, drums & tanks for use with barrels, drums & tanks for transferring media into smaller containers

Fluids petroleum based fluids, diesel & kerosene



300301

300401



Lever Action Bio-Diesel & E85 Fuel Pump

Constructed from select materials which are compatible with bio diesel & E85 fuels

Steel bung with 2in threads, telescopic suction tube for use 15 - 55gallons drums & steel discharge spout

11in extra long pump body makes it easy to place refill containers on the drum for convenient filling

Flow 10oz/stroke - fluids: bio-diesel & E85 fuels



300401



201101

201101



Rotary Barrel Pump - Telescopic tube - bung adaptor 1in

Pump body is sturdy cast iron with precisely machined cast iron vanes for better draw & smoother delivery
Seals are made from hi nitrile rubber
Telescopic suction tube, 2in cast iron bung nut & discharge spout
Use on 15 - 55 gallons barrels
Flow rate 1.30gallons/20turns
Fluids diesel, kerosene, heating oils, motor oils, lubricating oils (up to SAE90) and other non-corrosive media



201301

201301



Ezee Flo Pumps for use with drums with capacity 55 gal - with rigid steel spout - 2in extern

Heavy duty steel suction tube, with the pump head made from high density polyethylene
Includes 2 adaptadores for use with plastic pull out or 2in external threads
Rigid steel spout
Use on 55 gallon drum
Fluids engine oils, gear oils, diesel, 100% antifreeze and light fuel oil



201401

201401



Ezee Flo Pumps for use with drums with capacity 55 gal - with Of discharge hose fitted with

Heavy duty steel suction tube, with the pump head made from high density polyethylene
Includes 2 adaptadores for use with plastic & metal drums and an additional adaptor for use with platic pull out spout
48in discharge hose fitted with curved metal spout
Use on 55 gallon drum
Fluids: engine oils, gear oils, diesel, 100% antifreeze and light fuel oil

302501



Filtering for Diesel - 12V - 14 gal/min

Sturdy wheeled structure, large diameter wheels

Filtering capacity: first stage 30 micra for water absorption, second storage filter 5micra for impurities

Flow rate 14.8gpm

Voltage 12V, power watt 300, amp. Max 35

Duty circle 30 min

Max work pressure 50 psi

With manual nozzle, 13 ft x 3/4in delivery hose & 13 ft x 3/4in suction hose



302501

302502



Filtering for Diesel - 120v/60hz - 14 gal/min

Sturdy wheeled structure, large diameter wheels

Filtering capacity: first stage 30 micra for water absorption, second storage filter 5micra for impurities

Flow rate 14.8 gpm

Voltage 120V/60, power watt 350/600, amp. Max 3/6

Duty circle 30 min

Max work pressure 50 psi

With manual nozzle, 13 ft x 3/4in delivery hose & 13 ft x 3/4in suction hose



302502





303101

303101



Connect Swivel Z - Input NPTM 3/4in, Output NPTF 3/4in

In aluminum

Swivel in full 360° circle

Fuel inlet threaded: 3/4in NPTF

Fuel outlet threaded: 3/4in NPTM



303102

303102



Connect Swivel Z - Input NPTM 1in, Output NPTF 1in

In aluminum

Swivel in full 360° circle

Fuel inlet threaded: 1in NPTF

Fuel outlet threaded: 1in NPTM



303201

303201



Spout 1in - 1 1/16in

In aluminum



303202

303202



Spout 3/4in - 15/16in

In aluminum




303203

303203




Spout 1/2in - 13/16in

In aluminum

350210 
No Spill 1.25 gal
 Capacity: 1.25 gal
 In polypropylene
 Flow rate: 2.9 gal




350210

350211 
No Spill 2.5 gal
 Capacity: 2.5 gal
 In polypropylene
 Flow rate: 2.9 gal



350211

350212 
No Spill 5 gal
 Capacity: 5 gal
 In polypropylene
 Flow rate: 2.9 gal



350212

F



302201

302201



Fluid Monitoring OCIO

Continuous tank level monitoring, check:

- Set tank type dimensions
- Define alarm levels
- Define indication level
- Define measurement unit
- Calibrate the instrument

Maximum measurable height: 13ft

Probe tube length: 33ft

Maximum monitoring length: 160 ft at tank

Voltage 120V/60HZ

Accuracy: +/-1%



202801

202801



OCIO Desk Single Tank

OCIO is available with direct PC connections. By means of an interface you can connect up to 12 OCIO level gauges and send data direct via cable to a PC up to 3280ft meters away

Dedicated software has been developed to permit the storage of historic tank level data according to different criteria:

- * at each timer interval
- * at each variation in level
- * at each variation in volume

302301



302301



Fuel Filter - 10 microns

Aluminum die cast filter

Translucent polypropylene filter bowl

Brass drain outlet

Maximum work pressure 150 psi

Fuel outlet: 1in NPT

302402



302402



Replacement filter element - 10 microns

10 micron paper filter

Filtering water

Maximum work pressure 150psi

Fuel inlet threaded: 1in NPT - with rubber gasket