

AIR DISTRIBUTION



**AUTOMATIC
LUBE SYSTEMS**

AUTOMATIC LUBE SYSTEMS, INC.

WWW.AUTOMATICLUBESYSTEMS.COM

PHONE: 844-LUBE-SYS OR 844-582-3797

SALES@AUTOMATICLUBESYSTEMS.COM





TIRE INFLATORS

pag. 139



FILTER REGULATOR & LUBRICATOR

pag. 140



CLOSED AUTOMATIC HOSE REELS

pag. 142



HOSES

pag. 144



ACCESSORIES

pag. 146



400101

400101



Tire Inflator

Working range 45 - 145 PSI
Air inlet pressure 150 - 175 PSI
Voltage 120V
Power 10W
Consumption in stand by 1,7W
Operating temperature -10° to +50°
Accuracy <1%
Compatibility of nitrogen total
Affordable and Cheap
Aluminum display
Front for Easy Cleaning
Keys antiwear touch
Professional Use Housed
1 year warranty
Robust
Display 1 in
Default 32
Hose holder and integrated wall

Suggested use

Auto Centers
Mechanical Workshops
fire repair
Fleet of Vehicles
Patios in General
Bicycle Shops



400201

400201



Premium Tire Inflator

Working range 45 - 145 PSI
Air inlet pressure 150 - 175 PSI
Voltage 120V
Power 10W
Consumption in stand by 1.7W
Operating temperature -10° to +50°
Accuracy <1%
Compatibility of nitrogen total
Distinctive design;
Outputs protected hoses (internal spikes): reduced risk of damage;
Low power consumption, cold tight;
Audible and visual signals end of operation. alerting the user that the calibration has been completed;
Keyboard fully sealed against water and dust. High life, surpassing more than 10 million touches;
Dedicated key to conversion of pressure units (PSI /BAR. BAR /PSI);
Neutral colors, easy to dean, simple operation;
Fast secure and accurate;
Water resistant and weatherproof;
External housing in polycarbonate
Certificates ETL (USA), CE. PTB, ISO9001
1 year warranty

Suggested use

Gas Stations
Fleet
Stores Tires
Tire repair
Workshops
Rental
Bicycle Shops
Balls





400301



Air Regulator - Inlet 1/4in NPTF - Relief Valve - 120GPM

In aluminum
Holder for wall
Maximum flow rate 120gpm
Inlet threaded 1/4in NPTF
Pressure adjustment range 0-150PSI
Applied pressure range 0.05~0.85MPa
Medium temperature 0~140°F
Relief valve



400401



Filter Regulator

In aluminum
Holder for wall
Maximum flow rate 110gpm
Inlet threaded 1/4in NPTF
Pressure adjustment range 0-150PSI
Applied pressure range 0.05~0.9MPa
Medium temperature 0~140°F



400501



Filter - Regulator & Lubricator - Inlet 1/4in NPTF - 110GPM

In aluminum
Holder for wall
Maximum flow rate 110gpm
Inlet threaded 1/4in NPTF
Pressure adjustment range 0-150PSI
Applied pressure range 0.05~0.85MPa
Medium temperature 0~140°F
Relief valve

400601



Filter - Regulator & Lubricator - Air Regulator

In aluminum
Holder for wall
Maximum flow rate 650gpm
Inlet threaded 1/2in NPTF
Pressure adjustment range 0-150PSI
Applied pressure range 0.05~0.85MPa
Medium temperature 0~140°F
Relief valve



400701



Filter Regulator

In aluminum
Holder for wall
Maximum flow rate 650gpm
Inlet threaded 1/2in NPTF
Pressure adjustment range 0-150PSI
Applied pressure range 0.05~0.9MPa
Medium temperature 0~140°F



AIR
A

400801



Filter - Regulator & Lubricator

In aluminum
Holder for wall
Maximum flow rate 650gpm
Inlet threaded 1/2in NPTF
Pressure adjustment range 0-150PSI
Applied pressure range 0.05~0.85MPa
Medium temperature 0~140°F
Relief valve



CLOSED AUTOMATIC HOSE REELS



450102 - 450103



450102 - 450103 7.50 0.64 1

450102 - 450103



Closed hose reels in plastic swivelling for air-water 145 psi

Equipped with:


Polyurethane blue hoses

Nickel-plated brass connections

Swivelling joint 90° nickel-plated brass

Viton seals

Article	Hose length	Ø hose	Inlet-outlet
450102	35 + 3 ft	2x4	NPTF 1/4in -NPT M 1/4in
450103	25 + 3 ft	3x5	NPTF 1/4in -NPT M 1/4in



450101



450101 25.80 0.92 1

450101



Closed hose reels varnished fixed for air-water 290 psi

Equipped with:


Polyurethane blue hoses

Nickel-plated brass connections

Swivelling joint 90° nickel-plated brass

Viton seals

Article	Hose length	Ø hose	Inlet-outlet
450101	35 + 5 ft	3x4	NPTF 1/4in - NPTM 1/4in

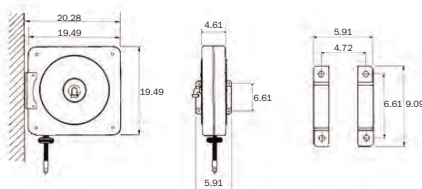

450104



450104 27.43 0.92 1

450104



Closed hose reels varnished swivelling for air-water 290 psi

Equipped with:


Polyurethane blue hoses

Nickel-plated brass connections

Swivelling joint 90° nickel-plated brass

Viton seals

Article	Hose length	Ø hose	Inlet-outlet
450104	35 + 5 ft	3x5	NPTF 1/4in - NPTM 1/4in

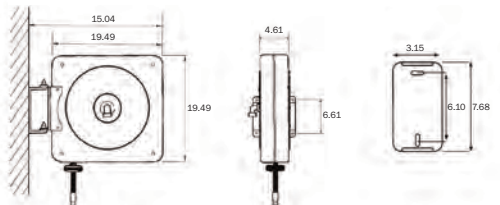

FOR AIR-WATER 290 psi

Equipped with:
Synthetic black rubber hoses R6
Galvanized connections
Swivelling joint 90° nickel
Plated brass
Viton seals

A

Article	Hose length	Ø hose	Inlet-outlet
450107	Without hose	-	NPTF 3/8in - NPTM 3/8in
450110	Without hose	-	NPTM 1/2in - NPTM 1/2in
450105	35 ft	5/16in	NPTF 3/8in - NPTM 1/4in
450106	55 ft	5/16in	NPTF 3/8in - NPTM 1/4in
450108	30 ft	3/8in	NPTF 3/8in - NPTM 3/8in
450109	55 ft	3/8in	NPTF 3/8in - NPTM 3/8in
450111	30 ft	1/2in	NPTM 1/2in - NPTM 1/2in
450112	45 ft	1/2in	NPTM 1/2in - NPTM 1/2in
450113	55 ft	1/2in	NPTM 1/2in - NPTM 1/2in



FOR WATER 302 °F 2901 psi

Equipped with:
Synthetic rubber hoses no trace blue 1SC
Galvanized connections
Swivelling joint 90° stainless steel AISI 304
Viton seals

A

Article	Hose length	Ø hose	Inlet-outlet
450119	Without hose	-	NPTM 3/8in - NPTM 3/8in
450114	30 ft	5/16in	NPTM 3/8in - NPTM 3/8in
450115	45 ft	5/16in	NPTM 3/8in - NPTM 3/8in
450116	30 ft	3/8in	NPTM 3/8in - NPTF 3/8in
450117	45 ft	3/8in	NPTM 3/8in - NPTF 3/8in
450118	55 ft	3/8in	NPTM 3/8in - NPTF 3/8in



A

FOR WATER 302 °F 5801 psi

Equipped with:
Synthetic rubber hoses no trace blue 2SC
Galvanized connections
Swivelling joint 90° stainless steel AISI 304
Viton seals

A

Article	Hose length	Ø hose	Inlet-outlet
450119	Without hose	-	NPTM 3/8in - NPTM 3/8in
450120	30 ft	3/8in	NPTM 3/8in - NPTF 3/8in
450121	45 ft	3/8in	NPTM 3/8in - NPTF 3/8in
450122	55 ft	3/8in	NPTM 3/8in - NPTF 3/8in




* All hose reels in this page.

50.49 < 65.82

2.12

1

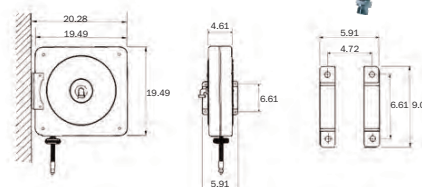



AIR-WATER 290 psi

Polyurethane blue hoses

Connection nichel-plated brass

A

Article	Hose length	Ø hose	Dimensions	Inlet-outlet
450301	35 ft	1/4in	2.36x3.94	NPTF 1/4in - NPTM 1/4 in
450302	25 ft	5/16in	3.15x4.73	NPTF 1/4in - NPTM 1/4in
450303	35 ft	5/16in	3.15x4.73	NPTM 3/8in - NPTM 1/4in
450304	35 ft	5/16in	3.15x4.73	NPTF 3/8in - NPTM 1/4 in
450305	45 ft	5/16in	3.15x4.73	NPTF 3/8in - NPTM 1/4 in
450306	65 ft	5/16in	3.15x4.73	NPTF 3/8in - NPTM 1/4 in
450307	30 ft	3/8in	3.94x5.52	NPTF 3/8in - NPTM 3/8in
450308	45 ft	3/8in	3.94x5.52	NPTF 3/8in - NPTM 3/8in
450309	65 ft	3/8in	3.94x5.52	NPTF 3/8in - NPTM 3/8in
450310	30 ft	1/2in	5.12x7.49	NPTF 1/2in - NPTM 1/2in
450311	45 ft	1/2in	5.12x7.49	NPTF 1/2in - NPTM 1/2in
450312	55 ft	1/2in	5.12x7.49	NPTF 1/2in - NPTM 1/2in
450313	65 ft	1/2in	5.12x7.49	NPTF 1/2in - NPTM 1/2in
450314	80 ft	1/2in	5.12x7.49	NPTF 1/2in - NPTM 1/2in



AIR-WATER 290 psi

Synthetic black rubber hoses R6
Galvanized connections



Article	Hose length	Ø hose	Dimensions	Inlet-outlet
450315	35 ft	5/16in	3.11x5.63	NPTF 3/8in - NPTM 3/8in
450316	55 ft	5/16in	3.11x5.63	NPTF 3/8in - NPTM 3/8in
450317	30 ft	3/8in	3.74x6.3	NPTF 3/8in - NPTM 3/8in
450318	55 ft	3/8in	3.74x6.3	NPTF 3/8in - NPTM 3/8in
450319	65 ft	3/8in	3.74x6.3	NPTF 3/8in - NPTM 3/8in
450320	30 ft	1/2in	5x7.49	NPTF 1/2in - NPTM 1/2in
450321	45 ft	1/2in	5x7.49	NPTF 1/2in - NPTM 1/2in
450322	55 ft	1/2in	5x7.49	NPTF 1/2in - NPTM 1/2in
450323	65 ft	1/2in	5x7.49	NPTF 1/2in - NPTM 1/2in
450324	80 ft	1/2in	5x7.49	NPTF 1/2in - NPTM 1/2in
450325	95 ft	1/2in	5x7.49	NPTF 1/2in - NPTM 1/2in
450326	45 ft	3/4in	7.49x10.17	NPTF 3/4in - NPTM 3/4in
450327	65 ft	3/4in	7.49x10.17	NPTF 3/4in - NPTM 3/4in
450328	95 ft	3/4in	7.49x10.17	NPTF 3/4in - NPTM 3/4in
450329	130 ft	3/4in	7.49x10.17	NPTF 3/4in - NPTM 3/4in
450330	45 ft	1in	10.01x13.08	NPTF 1in - NPTM 1in
450331	65 ft	1in	10.01x13.08	NPTF 1in - NPTM 1in
450332	95 ft	1in	10.01x13.08	NPTF 1in - NPTM 1in



450201

450201



Swivelling joint 90° AIR-WATER 290 psi NPTF 3/8in

Brass, viton seals



450202

450202



Swivelling joint 90° AIR-WATER 290 psi NPTF 1/2in

Brass, viton seals



450203

450203



Swivelling joint 90° AIR-WATER 290 psi NPTF 3/4in

Brass, viton seals



450204

450204



Swivelling joint 90° AIR-WATER 290 psi NPTF 1in

Brass, viton seals



450333

450333



Swivelling joint 90° WATER 302°F - 5801 psi NPTF 3/8in

Stainless steel AISI 304, viton seals



450334

450334



Swivelling joint 90° WATER 302°F - 5801 psi NPTF 1/2in

Stainless steel AISI 304, viton seals



450335

450335



Swivelling joint 90° WATER 290 psi NPTF 3/4in

Stainless steel AISI 304, viton seals



450336

450336



Swivelling joint 90° WATER 1450 psi NPTF 1in

Stainless steel AISI 304, viton seals